

# A SEA-CHANGE IMPROVEMENT FOR BEND RESTRICTORS



## DYNA-BSR™ Bending Strain Relief

**A two-piece Bending Strain Relief featuring mid-span installation.**

**The most unique and innovative cable protection design in the market.**

No prep work is required to install it and full installation takes minutes.

When combined with the DYNA-HANGER II™, the DYNA-BSR™ provides the ultimate protection for your seismic towing and other applications.

- Unique patent-pending design, both halves slide together and lock
- Secured in-place with Quick Release Self-locking pins
- Simple time-saving installation offers quick deployment
- Easy removal for storage or cable repair




Shown attached to the PMI DHSS II™ the DYNA-BSR™ installs in a few simple steps.

## DYNA-BSR™ Bending Strain Relief

For a typical Multi-Line Towed Application please specify:

- Loads up to 6 metric tons (13,200 lbf)
- Load Angle from 20° to 45°
- Minimum Bend Radius
- Mounting

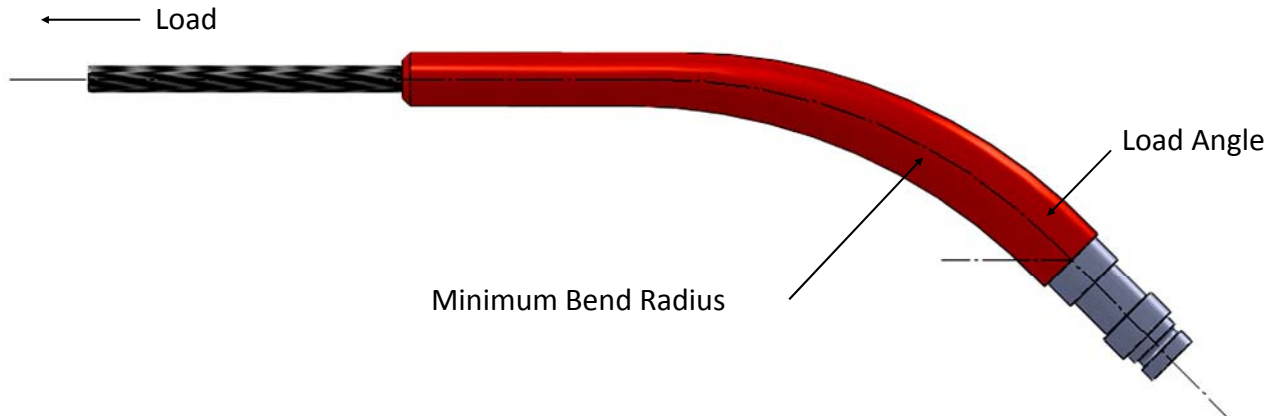

## PMI DYNA-BSR™ Assembly

